



TEST REPORT

Reference No...... : WTX22X07143803W002
Applicant : Guangzhou Netum Electronic Technology Co., Ltd.
Address : Building 1, No. 51 Xiangshan Avenue, Ningxi Street, Zengcheng District,
Guangzhou 511300, China
Manufacturer : The same as Applicant
Address : The same as Applicant
Product Name : Barcode Scanner
Model No...... : F6-1
Standards : **FCC PART15 SUBPART B**
Date of Receipt sample : 2022-07-14
Date of Test..... : 2022-07-14 to 2022-08-10
Date of Issue : 2022-08-10
Test Report Form No. : WTX_FCC PART15B_001
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:

Mike Shi

Approved by:

Silin Chen



TABLE OF CONTENTS

1. GENERAL INFORMATION.....4

1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4

1.2 TEST STANDARDS.....5

1.3 TEST METHODOLOGY.....5

1.4 TEST FACILITY.....5

1.5 EUT SETUP AND OPERATION MODE.....6

1.6 MEASUREMENT UNCERTAINTY.....7

1.7 TEST EQUIPMENT LIST AND DETAILS.....8

2. SUMMARY OF TEST RESULTS.....9

3. CONDUCTED EMISSIONS.....10

3.1 TEST PROCEDURE.....10

3.2 BASIC TEST SETUP BLOCK DIAGRAM.....10

3.3 ENVIRONMENTAL CONDITIONS.....10

3.4 SUMMARY OF TEST RESULTS.....10

4. RADIATED EMISSION.....13

4.1 TEST PROCEDURE.....13

4.2 BLOCK DIAGRAM OF TEST SETUP.....13

4.3 TEST RECEIVER SETUP.....14

4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....14

4.5 ENVIRONMENTAL CONDITIONS.....14

4.6 SUMMARY OF TEST RESULTS.....14

EXHIBIT 1 - EUT PHOTOGRAPHS.....21

EXHIBIT 2 - EUT INTERNAL PHOTOGRAPHS.....26

EXHIBIT 3 - TEST SETUP PHOTOGRAPHS.....30

EXHIBIT 4 - USERS MANUAL.....32



Report version

Version No.	Date of issue	Description
Rev.00	2022-08-10	Original
/	/	/

WALTEK



1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT	
Product Name:	Barcode Scanner
Trade Name:	NETUM, NetumScan, Zacoora, RADALL, NTEUMM
Model No.:	F6-1
Adding Model(s):	NT-1698W, NT-1698LY, W5-X, L2, L6, L8, M2, S2, NT-2028, NT-1209, F10, K1, K2, K3, K5, NT-8099
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model F6-1, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	Battery: DC3.7V USB Port: DC5V
Rated Current:	/
Rated Power:	/
Power Adapter Model:	/
Lowest Internal Frequency:	16MHz
Highest Internal Frequency:	2478MHz
Classification of ITE:	Class B



1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15 Subpart B: Unintentional Radiators.

ANSI C63.4-2014: American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.



1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List			
Test Mode	Description	Remark	Power Supply Mode
TM1	Working via USB Cable	Connect to the PC;	AC120V 60Hz for PC
TM2	Working via 2.4GHz USB Receiver	Scan code	Battery: DC3.7V USB Port: DC5V

EUT Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
USB Cable	1.20	Shielded	With Ferrite	/

Special Cable List and Details				
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite	With / Without Chip
/	/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	Lenovo Pro 14IHU	/



1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Radiated Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

WALTEK



1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
<input checked="" type="checkbox"/> Chamber A: Below 1GHz					
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2022-03-22	2023-03-21
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2022-03-22	2023-03-21
Amplifier	Agilent	8447F	3113A06717	2022-01-07	2023-01-06
Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
Trilog Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input type="checkbox"/> Chamber A: Above 1GHz					
Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21
Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
<input type="checkbox"/> Chamber B: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
Amplifier	Agilent	8447D	2944A10179	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C: Below 1GHz					
EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-01-07	2023-01-06
Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
Amplifier	HP	8447F	2944A03869	2022-03-22	2023-03-21
<input checked="" type="checkbox"/> Conducted Room 1#					
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2022-03-25	2023-03-24
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2022-03-22	2023-03-21
AC LISN	Schwarz beck	NSLK8126	8126-224	2022-03-22	2023-03-21
<input type="checkbox"/> Conducted Room 2#					
EMI Test Receiver	Rohde & Schwarz	ESPI	10129	2022-03-22	2023-03-21
LISN	Rohde & Schwarz	ENV 216	100097	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing.



2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.107(a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

N/A: not applicable

WALTEK




3. Conducted Emissions

3.1 Test Procedure

The test is conducted under the description of ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.2 Basic Test Setup Block Diagram

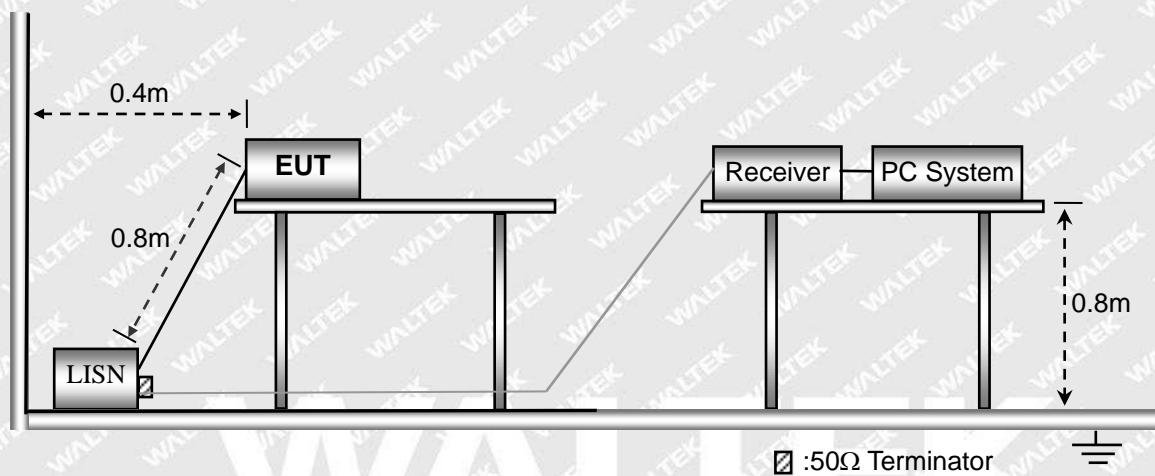

3.3 Environmental Conditions


Temperature:	23.5 °C
Relative Humidity:	54 %
ATM Pressure:	1014 mbar

3.4 Summary of Test Results

Please find the results below:




Test mode:	TM1	Polarity:	Line
------------	-----	-----------	------

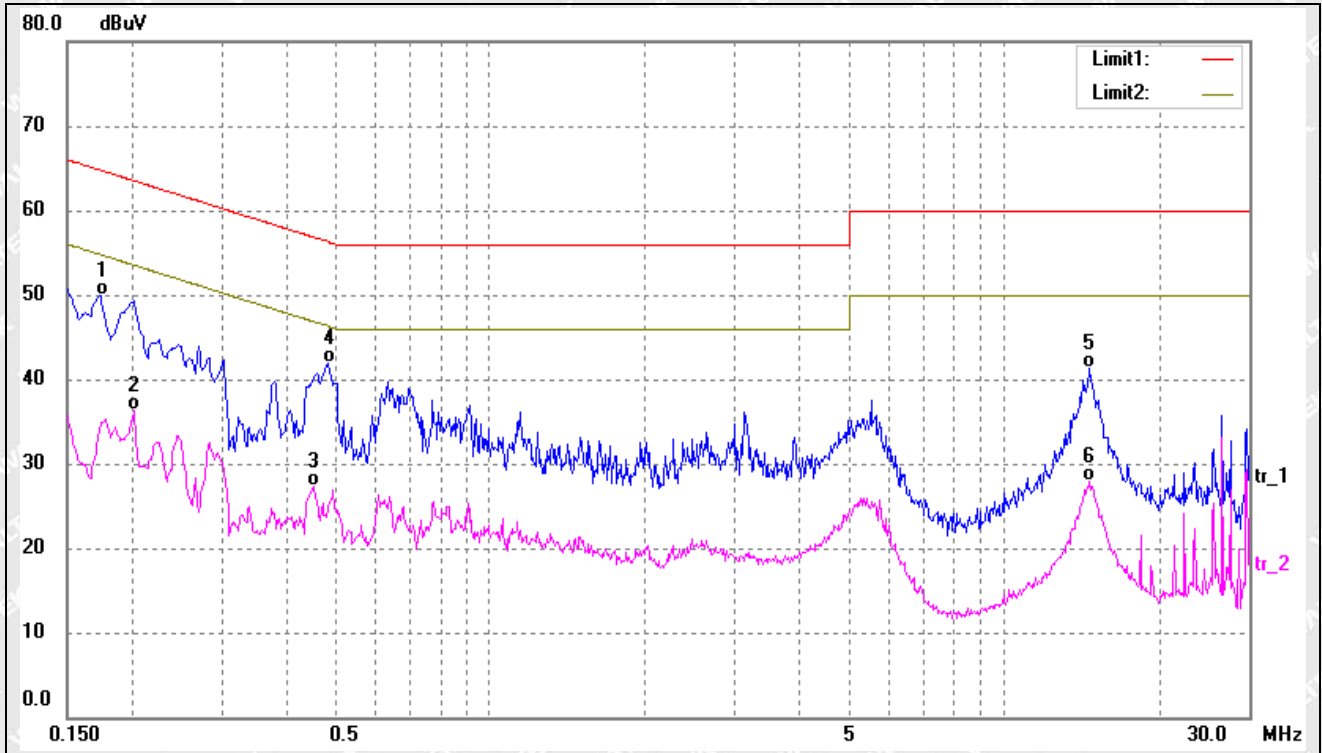

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1740	39.67	10.30	49.97	64.77	-14.80	QP
2	0.2020	25.93	10.30	36.23	53.53	-17.30	AVG
3	0.4500	17.02	10.23	27.25	46.88	-19.63	AVG
4*	0.4820	31.74	10.22	41.96	56.30	-14.34	QP
5	14.7020	31.00	10.25	41.25	60.00	-18.75	QP
6	14.7020	17.63	10.25	27.88	50.00	-22.12	AVG



Test mode:	TM1	Polarity:	Neutral
------------	-----	-----------	---------

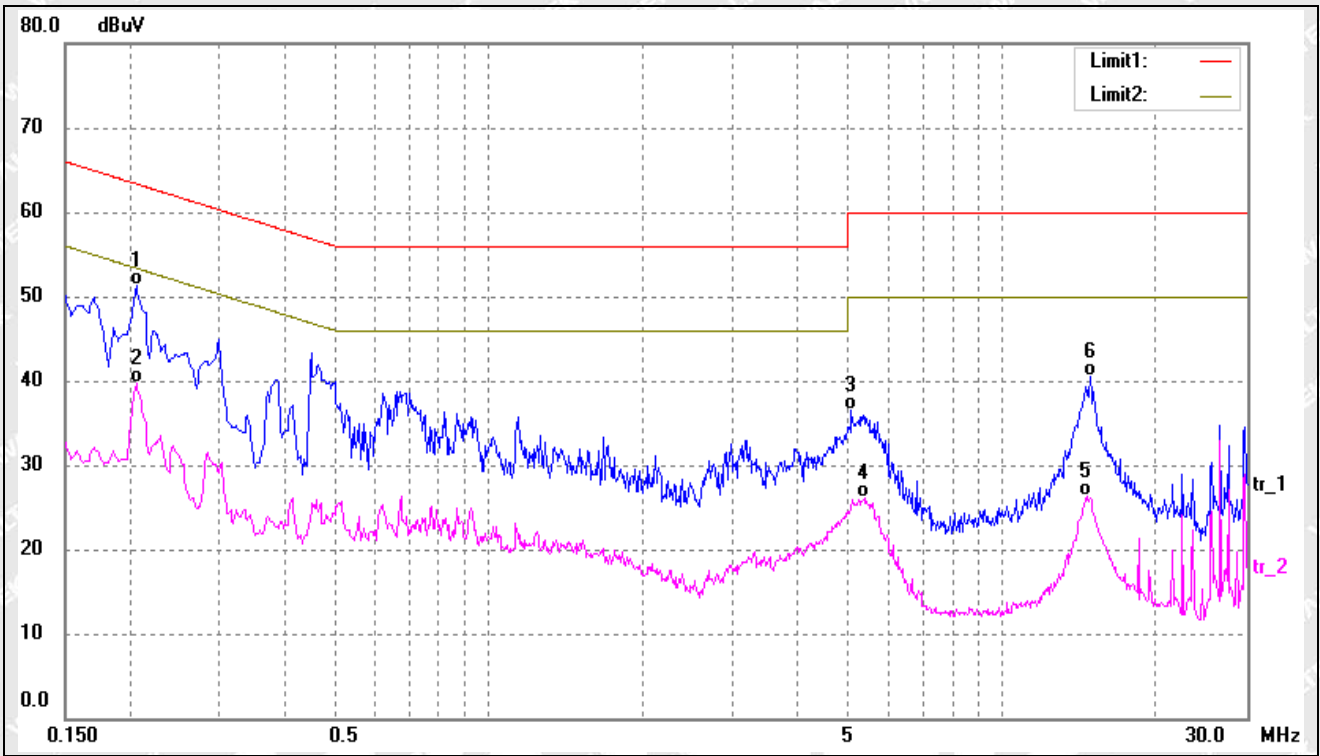

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.2060	41.06	10.29	51.35	63.37	-12.02	QP
2	0.2060	29.51	10.29	39.80	53.37	-13.57	AVG
3	5.1060	26.17	10.33	36.50	60.00	-23.50	QP
4	5.4020	15.75	10.33	26.08	50.00	-23.92	AVG
5	14.6380	16.03	10.25	26.28	50.00	-23.72	AVG
6	14.9060	30.28	10.24	40.52	60.00	-19.48	QP



4. RADIATED EMISSION


4.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

4.2 Block Diagram of Test Setup

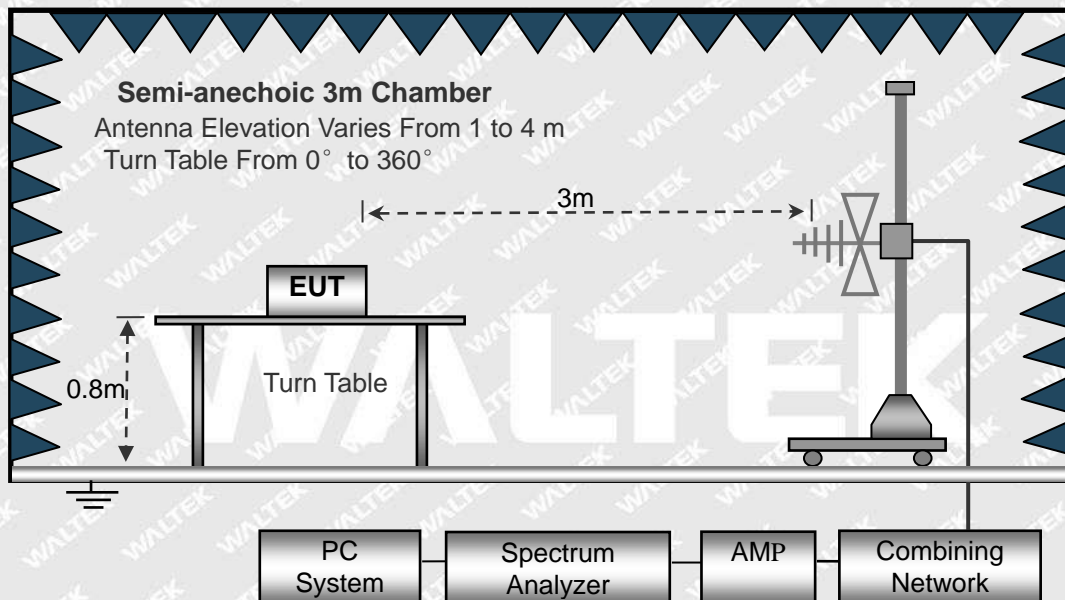



4.3 Test Receiver Setup

Frequency :9kHz-30MHz
 RBW=10KHz,
 VBW =30KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak

Frequency :30MHz-1GHz
 RBW=120KHz,
 VBW=300KHz
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, QP

Frequency :Above 1GHz
 RBW=1MHz,
 VBW=3MHz(Peak), 10Hz(AV)
 Sweep time= Auto
 Trace = max hold
 Detector function = peak, AV

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Correct}$$

$$\text{Correct} = \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.5 Environmental Conditions

Temperature:	23.5°C
Relative Humidity:	54 %
ATM Pressure:	1011 mbar


4.6 Summary of Test Results

Please find the results below:



Below 1GHz


Test mode:	TM1	Polarity:	Horizontal
------------	-----	-----------	------------

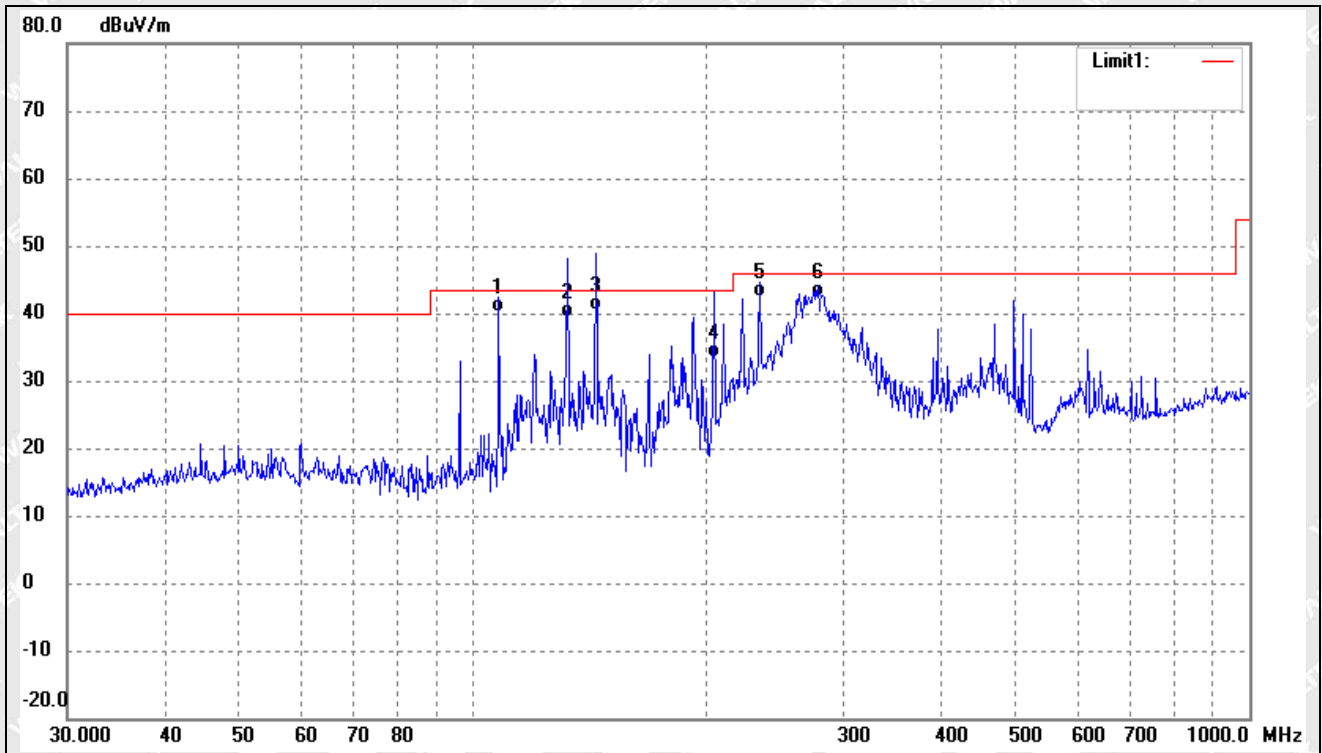

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	107.8877	52.74	-12.49	40.25	43.50	-3.25	-	-	QP
2	132.2206	54.29	-14.89	39.40	43.50	-4.10	-	-	QP
3	143.8295	55.52	-15.22	40.30	43.50	-3.20	-	-	QP
4	204.2377	45.58	-12.28	33.30	43.50	-10.20	-	-	QP
5	234.1684	53.80	-11.39	42.41	46.00	-3.59	-	-	QP
6	278.0668	52.51	-10.01	42.50	46.00	-3.50	-	-	QP




Test mode:	TM1	Polarity:	Vertical
------------	-----	-----------	----------

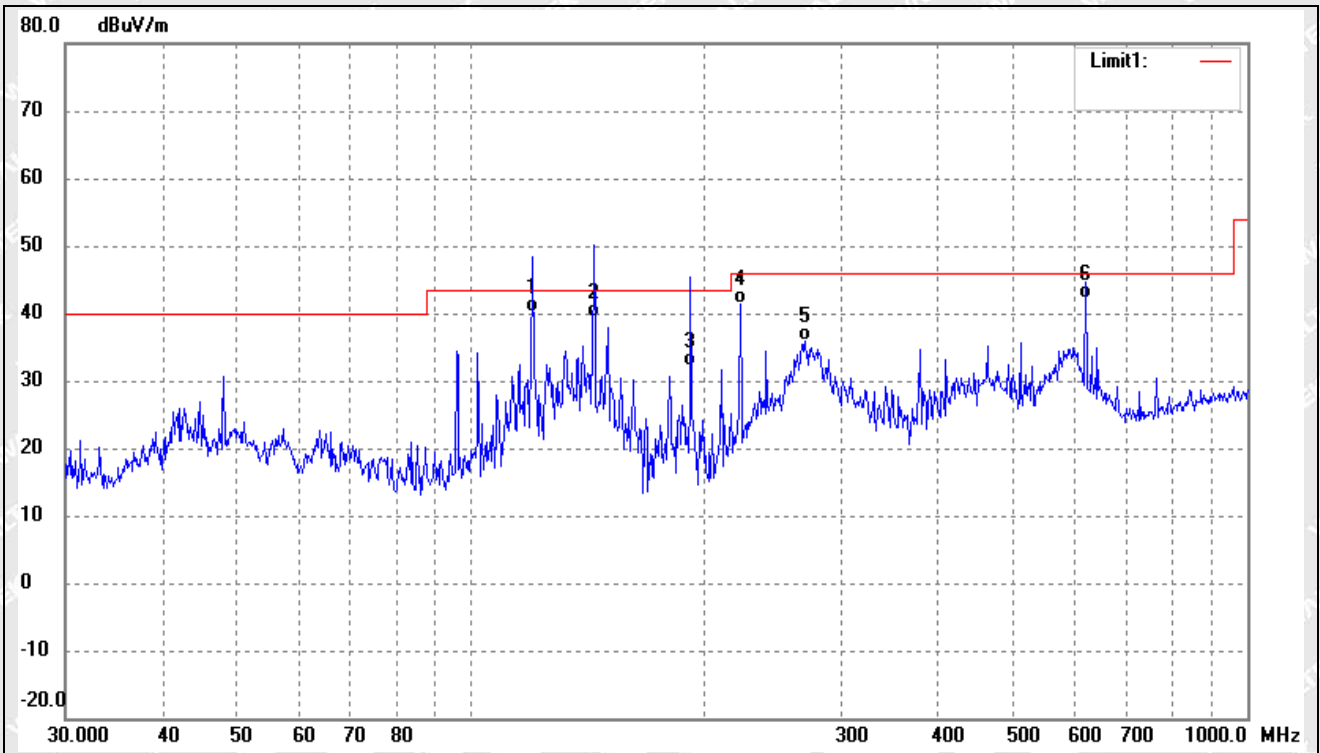

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	119.8556	54.13	-13.91	40.22	43.50	-3.28	-	-	QP
2	143.8295	54.72	-15.22	39.50	43.50	-4.00	-	-	QP
3	191.7450	44.94	-12.74	32.20	43.50	-11.30	-	-	QP
4	222.1698	53.10	-11.74	41.36	46.00	-4.64	-	-	QP
5	269.4284	46.11	-10.28	35.83	46.00	-10.17	-	-	QP
6	618.5369	45.75	-3.60	42.15	46.00	-3.85	-	-	QP




Test mode:	TM2	Polarity:	Horizontal
------------	-----	-----------	------------

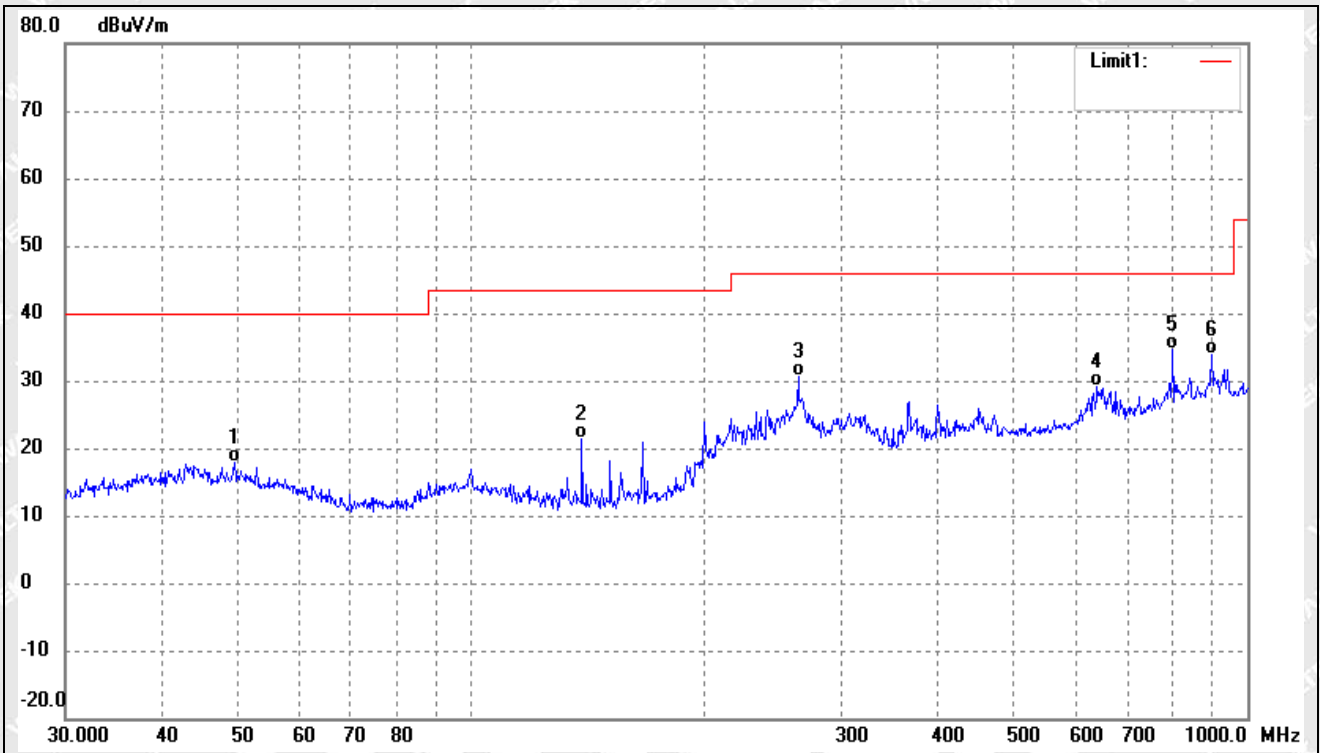

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	28.82	-10.89	17.93	40.00	-22.07	-	-	QP
2	138.8735	36.59	-15.13	21.46	43.50	-22.04	-	-	QP
3	263.8190	41.14	-10.47	30.67	46.00	-15.33	-	-	QP
4	640.6109	32.60	-3.41	29.19	46.00	-16.81	-	-	QP
5	801.7862	35.95	-1.39	34.56	46.00	-11.44	-	-	QP
6	900.1473	33.43	0.48	33.91	46.00	-12.09	-	-	QP



Test mode:	TM2	Polarity:	Vertical
------------	-----	-----------	----------

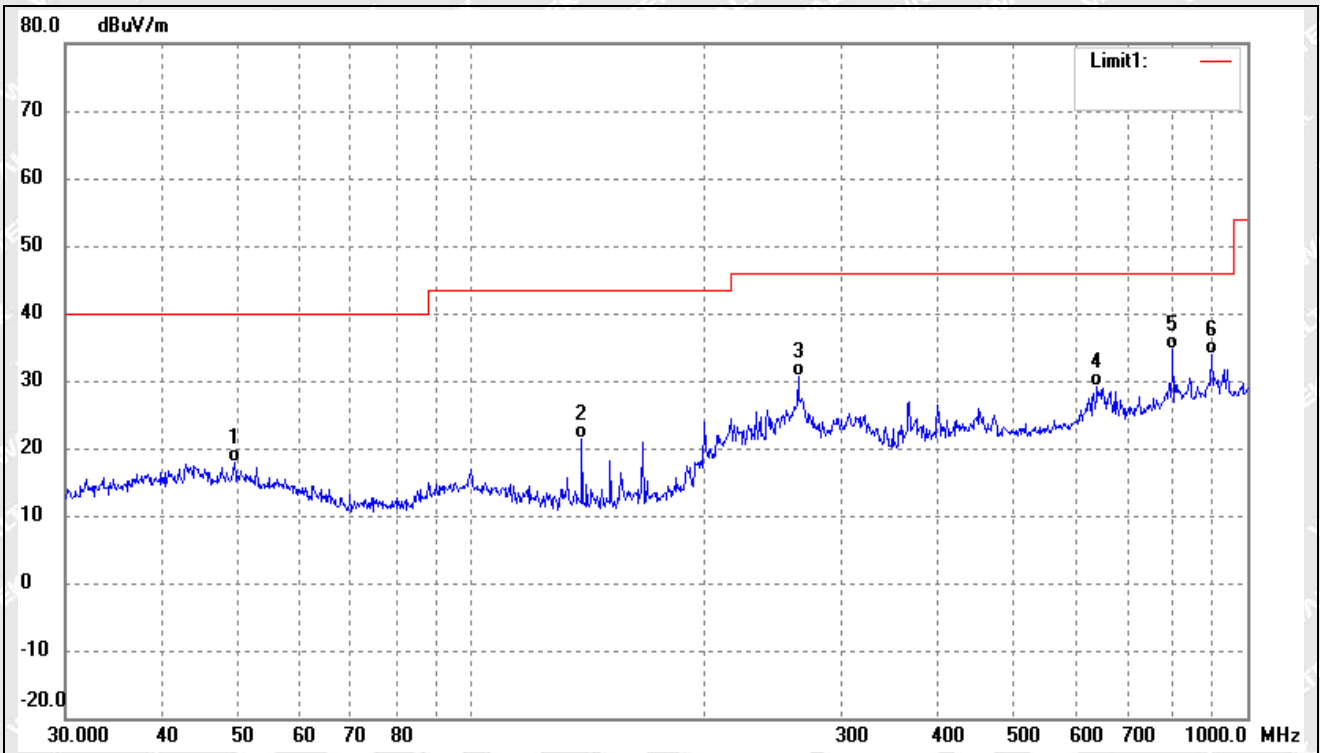


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.5328	28.82	-10.89	17.93	40.00	-22.07	-	-	QP
2	138.8735	36.59	-15.13	21.46	43.50	-22.04	-	-	QP
3	263.8190	41.14	-10.47	30.67	46.00	-15.33	-	-	QP
4	640.6109	32.60	-3.41	29.19	46.00	-16.81	-	-	QP
5	801.7862	35.95	-1.39	34.56	46.00	-11.44	-	-	QP
6	900.1473	33.43	0.48	33.91	46.00	-12.09	-	-	QP



Above 1GHz


Test mode:	TM1 (worst case)	Polarity:	Horizontal
------------	------------------	-----------	------------

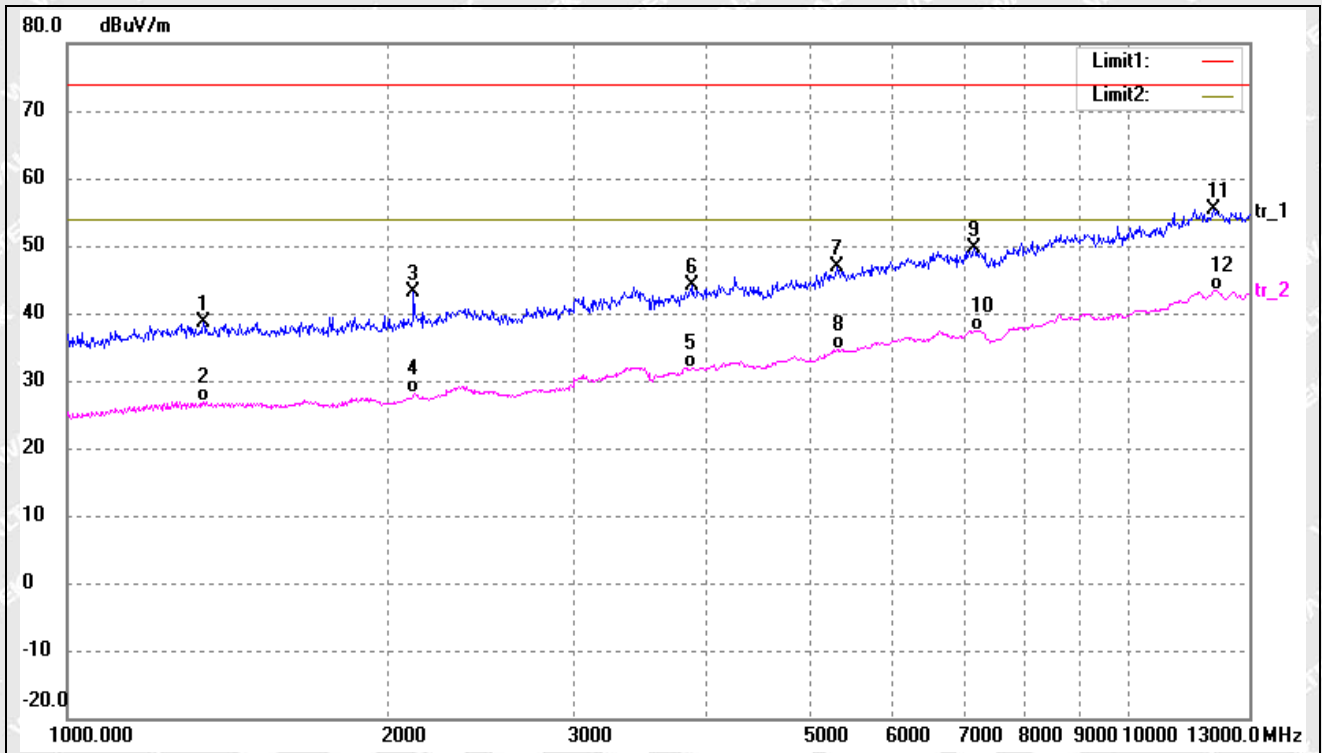

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1343.085	52.23	-13.63	38.60	74.00	-35.40	-	-	peak
2	1343.085	40.55	-13.63	26.92	54.00	-27.08	-	-	AVG
3	2120.242	54.65	-11.48	43.17	74.00	-30.83	-	-	peak
4	2125.687	39.69	-11.47	28.22	54.00	-25.78	-	-	AVG
5	3874.022	39.60	-7.61	31.99	54.00	-22.01	-	-	AVG
6	3883.972	51.85	-7.60	44.25	74.00	-29.75	-	-	peak
7	5311.010	51.17	-4.41	46.76	74.00	-27.24	-	-	peak
8	5324.650	39.01	-4.39	34.62	54.00	-19.38	-	-	AVG
9	7151.457	50.94	-1.20	49.74	74.00	-24.26	-	-	peak
10	7206.699	38.68	-1.20	37.48	54.00	-16.52	-	-	AVG
11	12037.188	49.35	6.06	55.41	74.00	-18.59	-	-	peak
12	12099.096	37.37	6.09	43.46	54.00	-10.54	-	-	AVG



Test mode:	TM1 (worst case)	Polarity:	Vertical
------------	------------------	-----------	----------

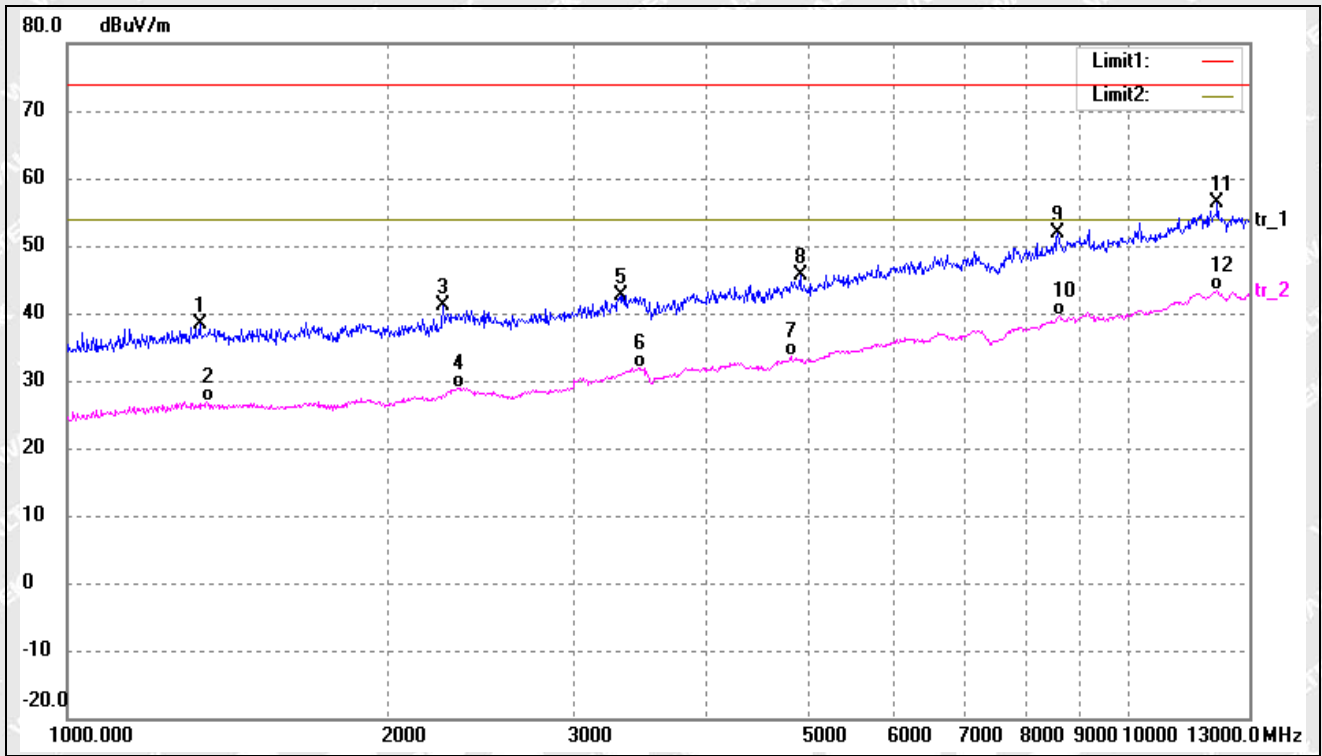

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	1332.790	52.01	-13.67	38.34	74.00	-35.66	-	-	peak
2	1353.460	40.46	-13.58	26.88	54.00	-27.12	-	-	AVG
3	2260.653	52.35	-11.17	41.18	74.00	-32.82	-	-	peak
4	2331.317	39.92	-11.02	28.90	54.00	-25.10	-	-	AVG
5	3329.963	50.99	-8.32	42.67	74.00	-31.33	-	-	peak
6	3469.465	40.04	-8.10	31.94	54.00	-22.06	-	-	AVG
7	4805.442	39.20	-5.65	33.55	54.00	-20.45	-	-	AVG
8	4905.066	50.96	-5.37	45.59	74.00	-28.41	-	-	peak
9	8579.945	50.99	0.95	51.94	74.00	-22.06	-	-	peak
10	8601.981	38.59	0.99	39.58	54.00	-14.42	-	-	AVG
11	12130.170	50.21	6.10	56.31	74.00	-17.69	-	-	peak
12	12130.170	37.32	6.10	43.42	54.00	-10.58	-	-	AVG

Remark: '-' Means the test Degree and Height are not recorded by the test software and only show the worst case in the test report.



EXHIBIT 1 - EUT PHOTOGRAPHS

EUT View 1



EUT View 2





EUT View 3



EUT View 4





EUT View 5



EUT View 6





EUT View 7



EUT View 8





EUT View 9



WALTEK

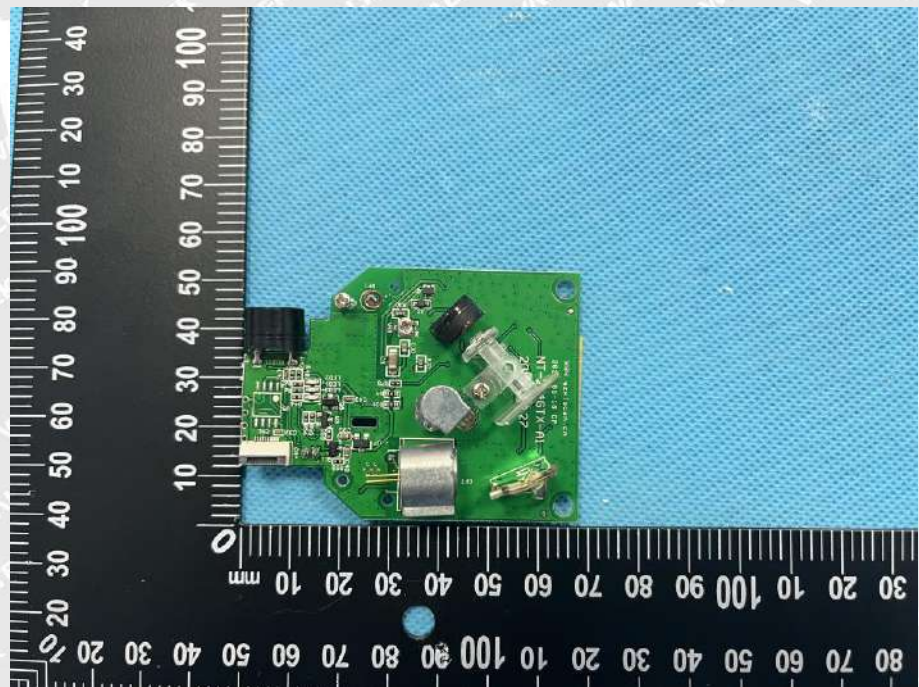




EXHIBIT 2 - EUT INTERNAL PHOTOGRAPHS

**EUT Housing and Board
View 1**




**Solder
Board-Component View
1**



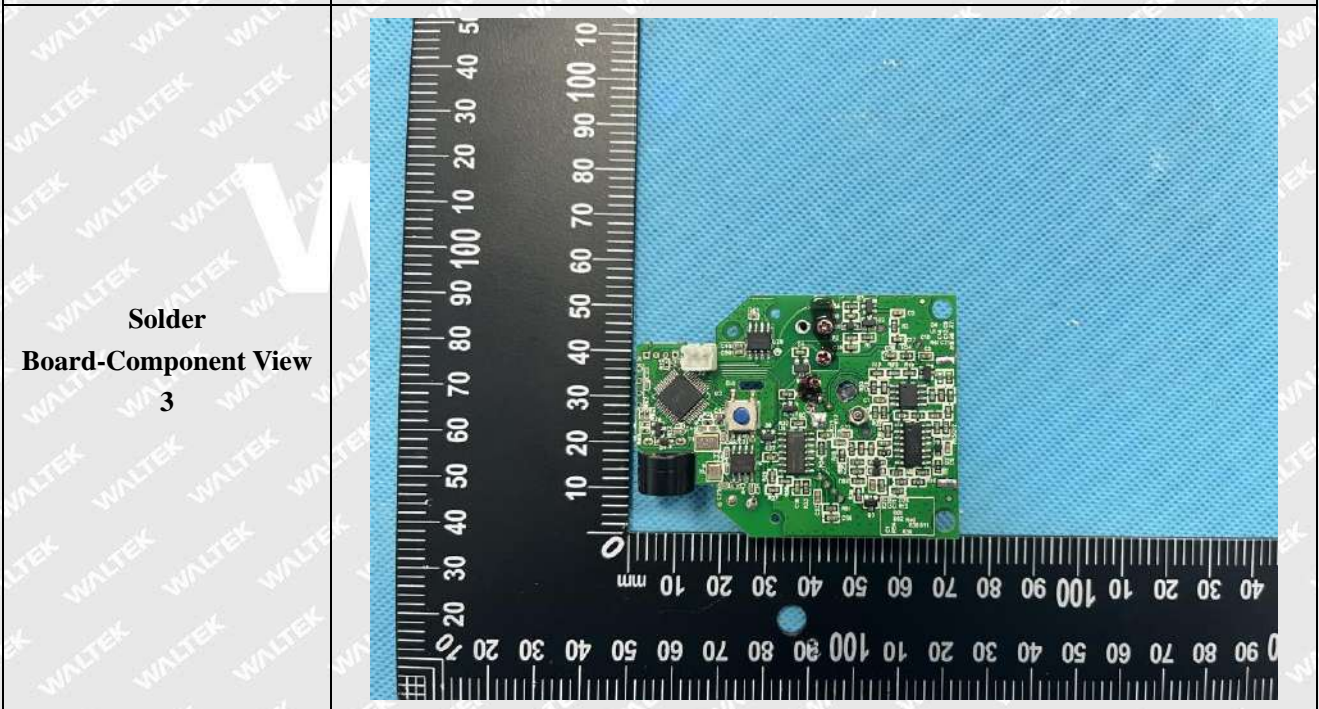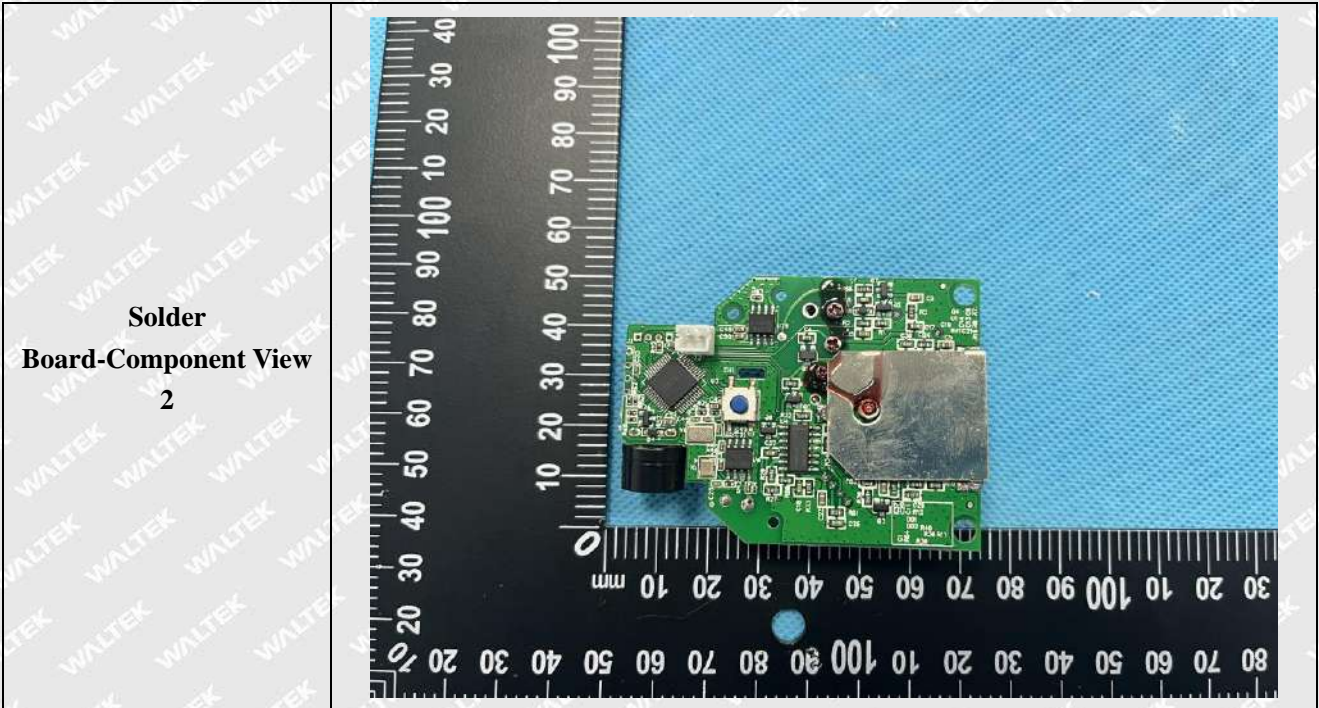




**Solder
Board-Component View
4**

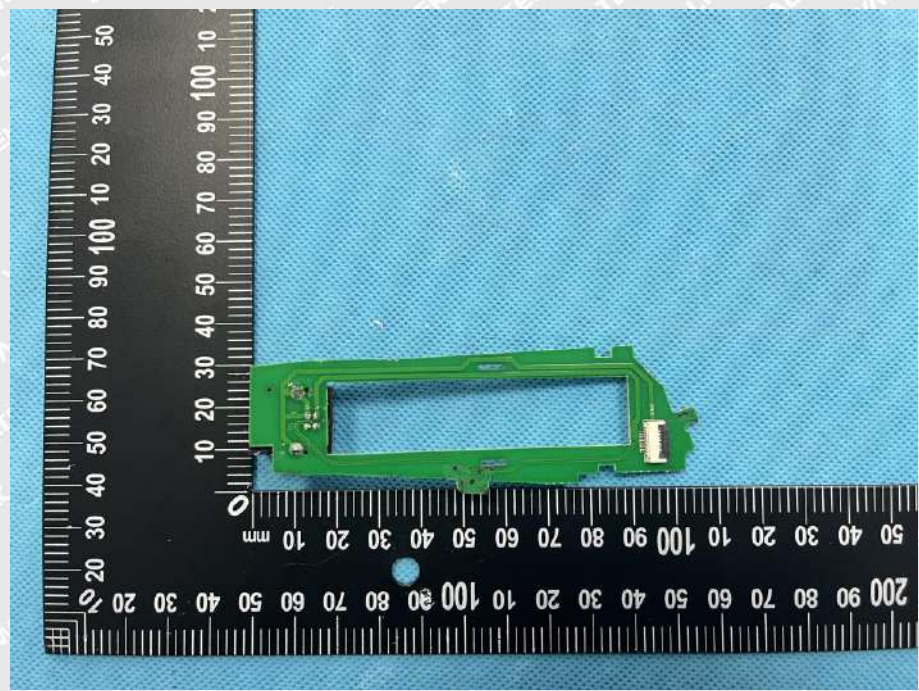

**Solder
Board-Component View
5**



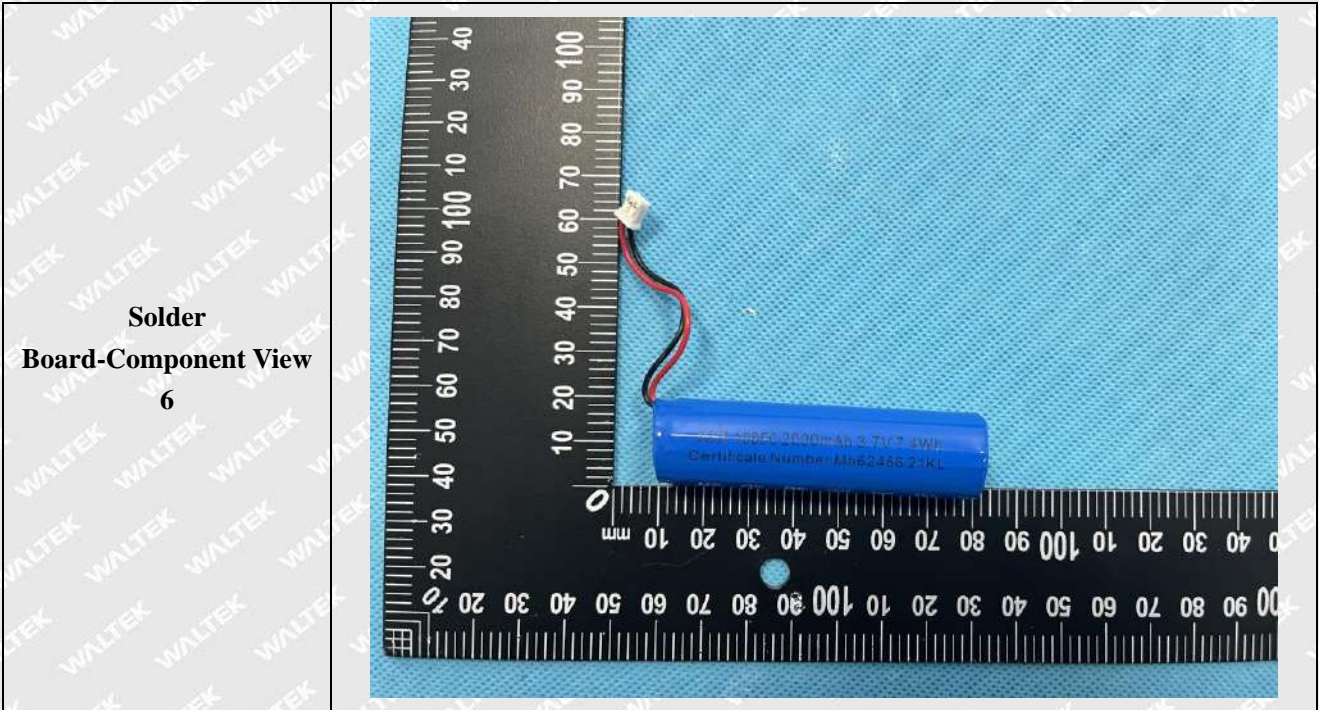


WALTEK




EXHIBIT 3 - TEST SETUP PHOTOGRAPHS

**Conducted Emission
Test Setup**

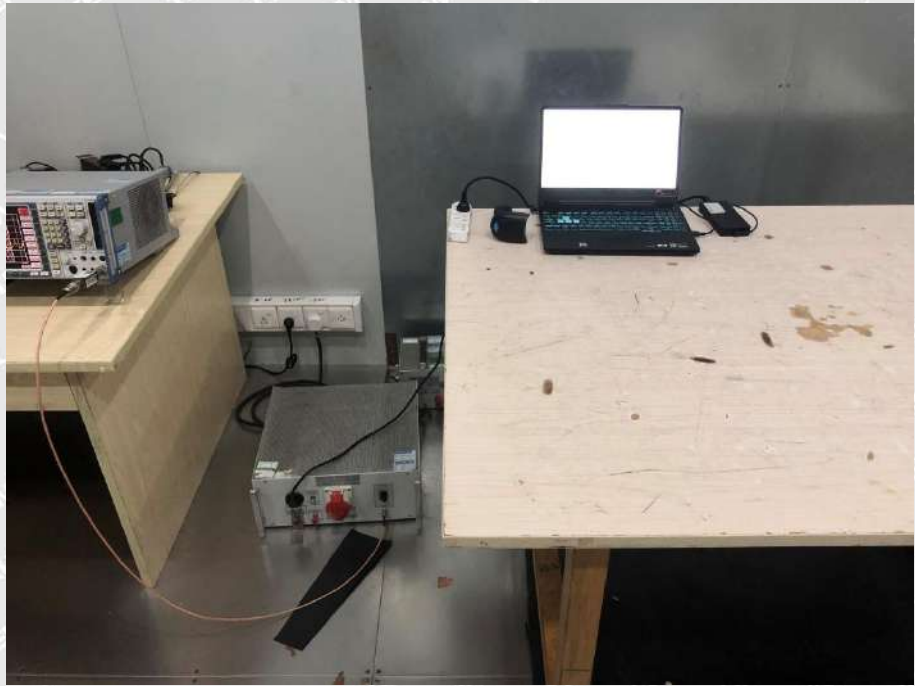

**Radiation Emission Test
View (30MHz to 1GHz)**

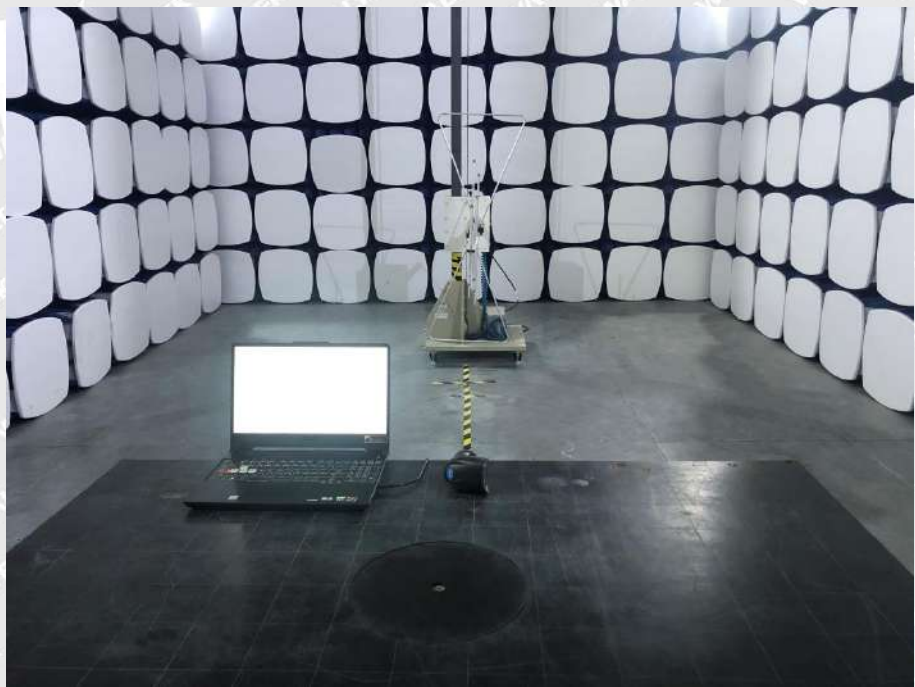



**Radiation Emission Test
View (Above 1GHz)**



WALTEK



EXHIBIT 4 - USERS MANUAL

Information to Users

According to the FCC Part 15.19, 15.21, and 15.105 rules, for this EUT, the instructions or operation manual furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

***** END OF REPORT *****